

10/17/00
09/690773
1000
US PRO
NT
10
10082 U.S. PRO
A

EXPRESS MAIL LABEL NO. EL696454191US
Date of Deposit: October 17, 2000
PATENT
Attorney's Ref. No. 60310

Box PATENT APPLICATION
TO THE ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Inventor(s): Rhoads et al.

For: USER CONTROL AND ACTIVATION OF WATERMARK ENABLED OBJECTS

Enclosed are:

- ☒ 16 pages of specification, 4 pages of claims, an abstract and a Combined Declaration and Power of Attorney.
- ☒ 2 sheet(s) of drawings.

		FILING FEE				Basic Fee
For	Claims filed	Number Allotted		Number Extra	Rate	\$710.00
Total Claims	23	20	=	3	\$18.00	\$54.00
Independent Claims	3	3	=	0	\$80.00	0
TOTAL FILING FEE			=	\$764.00		


- ☒ Please return the enclosed postcard to confirm that the items listed above have been received.

Respectfully submitted,

DIGIMARC CORPORATION

Date: October 17, 2000

Digimarc Corporation
19801 SW 72nd Avenue, Suite 250
Tualatin, OR 97062
Phone: 503-885-9699

By: 
Joel R. Meyer
Registration No. 37,677

User Control and Activation of Watermark Enabled Objects

Related Application Data

This patent application is a continuation in part of US Patent Application No. 09/633,587, filed August 7, 2000, which is a continuation in part of US Patent
5 Application No. 09/343,104, filed June 29, 1999. US Patent Application No. 09/343,104 claims priority from US Provisional Application No. 60/134,782, filed May 19, 1999. This patent application is also a continuation in part of US Patent Application No. 09/571,422, filed May 15, 2000, which claims priority to US Provisional Application No. 60/134,782, filed May 19, 1999. These patent applications are hereby incorporated by
10 reference.

The subject matter of the present application is related to that disclosed in US Patent 5,862,260, and in co-pending applications 09/503,881, filed February 14, 2000, which are hereby incorporated by reference.

Technical Field

The invention relates to multimedia signal processing, and in particular relates to hiding auxiliary information in media signals like audio, video and image signals.

Background and Summary

Digital watermarking is a process for modifying physical or electronic media to
20 embed a machine-readable code into the media. The media may be modified such that the embedded code is imperceptible or nearly imperceptible to the user, yet may be detected through an automated detection process. Most commonly, digital watermarking is applied to media signals such as images, audio signals, and video signals. However, it may also be applied to other types of media objects, including documents (e.g., through
25 line, word or character shifting), software, multi-dimensional graphics models, and surface textures of objects.

Digital watermarking systems typically have two primary components: an encoder that embeds the watermark in a host media signal, and a decoder that detects and reads the embedded watermark from a signal suspected of containing a watermark (a suspect signal). The encoder embeds a watermark by altering the host media signal. The reading component analyzes a suspect signal to detect whether a watermark is present. In applications where the watermark encodes information, the reader extracts this information from the detected watermark.

Several particular watermarking techniques have been developed. The reader is presumed to be familiar with the literature in this field. Particular techniques for embedding and detecting imperceptible watermarks in media signals are detailed in the assignee's co-pending application serial number 09/503,881 and US Patent 5,862,260, which are hereby incorporated by reference.

The invention provides methods and systems for associating watermark enabled objects with machine behaviors. In this context, machine behaviors refer to actions by devices or systems in response to a triggering event. Examples of these behaviors include fetching a web page, opening an email client to send an email to a specific person, initiating a phone or video conference call, etc. In the detailed description to follow, a watermark system enables users to associate machine behaviors with objects through a watermark embedded in the objects. The decoding of the watermark initiates a process for triggering the machine behaviors associated with the watermarked object. While the detailed description focuses on an implementation for stickers as a class of watermark enabled objects, the system and related methods apply to other forms of watermark enabled objects.

Further features will become apparent with reference to the following detailed description and accompanying drawings.

Brief Description of the Drawings

Fig. 1 is a system diagram depicting a system for associating watermark enabled objects with machine behaviors, and for triggering those behaviors in response to decoding watermarks.

5 Fig. 2 is a diagram depicting a variant of the system shown in Fig. 1 showing system components for enabling users to perform watermark identifier registration and embedding.

Detailed Description

10 The following description details a system and related methods for associating watermark enabled objects with machine behaviors. To illustrate the system, the description focuses on an example of watermark enabled stickers. As noted, the system applies more broadly to watermarking both physical and electronic objects. In particular, aspects of the system may be used for watermarking media signals like images, video and audio, as well as applying watermarks to physical objects. Watermarks may be applied to
15 physical objects by placing a watermarked image on a physical object, by modulating the surface topology of the object, etc. See US Patent 5,862,260, for more information about watermark embedding of and decoding from physical and electronic objects.

20 Stickers in all their varieties have found an enduring place in our society. From the workplace (Post-It ® brand message notes), to kids in a classroom, stickers have an inherit value associated with them, whether it be functional (seals, labels, etc.) or just to identify yourself with a particular affinity group (bumper stickers on cars). By placing a watermark on stickers they can be used in novel ways. By encoding a set of stickers with a watermark during production, specific machine behaviors can be assigned to them. These behaviors can be associated or even possibly changed by anyone from the
25 manufacturer through the distributor, all the way to the end-user. In addition, the users can create their own watermark enabled stickers by creating an image, embedding a watermark in it, and associating the watermark with one or more machine behaviors.

These behaviors may include, but are not limited to the following:

- Taking the user to a web-site linked to the watermark via a network address of the web-site or index to the network address.
- Opening an email client to email to a specific person (e.g., a person whose email address is stored in the machine behavior description associated with the watermark).
- Launching the user into an Interframe Relay Chat (IRC) session that other people with the same sticker can participate in.
- Authenticating the user as part of a process of accessing a network resource, such as account information or access to a computer network.
- Authentication the user in an electronic commerce transaction performed on a computer network.
- Sending an electronic card.
- Placing a phone or video-conference call.
- As props in a computer game. For example, the prop is a multi-sided, or multi-faceted object, where each side or facet has a watermarked image conveying a different message used to control the game. The computer game includes a watermark decoder for extracting the messages from image frames captured of the prop. The message may directly carry the message or act as an index to a more detailed game instruction in a database, such as an instruction that changes over time based on changes to the corresponding database entry by the user or game manufacturer.
- As a visual aide for disabled users.
- Anywhere where machine vision is not feasible.

In each of the above applications, the watermark carries information that links the watermarked object (e.g., sticker) with a machine behavior. To trigger this behavior, a watermark decoder application captures an image or images of the watermarked sticker, extracts the watermark, and uses information embedded in the watermark to determine

the associated machine behavior. The watermark decoder then takes action to initiate the machine behavior associated with the watermark.

For some applications, it is useful to enable the user to control the behavior associated with a watermarked object. This type of management may be handled by creating accounts for users and providing access to the accounts via some authentication method (email, passwords, etc.). For a number of reasons, these access methods can be problematic (losing passwords, asking kids for their email addresses, etc.). As an alternative, watermarks may be used to manage the process of associating behaviors with a watermarked object.

For example, in the scenario where a user wants to assign behaviors to a set of watermarked stickers they have received, they can hold up the first sticker (or its packaging), and be taken to a registration application to activate the stickers in the pack.

Fig. 1 is a system diagram depicting a system for associating watermark enabled objects with machine behaviors, and for triggering those behaviors in response to decoding watermarks. The system depicted in Fig. 1 is implemented on a computer network, namely, the Internet. The user accesses the system via a computer 100 connected to the Internet. The computer broadly encompasses a variety of devices, such as Personal Computers, set-top boxes, personal digital assistants, Internet appliances, set-top boxes, telephones (including wireless devices), audio and video players, and imaging devices (CCD or CMOS cameras, camcorders, printers, fax machines, copiers, etc.). The computer is connected to an image capture device 102, such as a PC camera or scanner, and includes watermark decoder software for decoding watermarks from images captured from the image capture device.

The system architecture shown in Fig. 1 includes a system (106) for managing the process of assigning behaviors to watermarked objects as well as a database management system (108) for initiating behaviors in response to decoding watermarks from the objects. These two systems may be integrated or implemented separately. In the application depicted here, the registration system and database management system are accessible via a network interface using standard network technology, including HTML, XML, and TCP/IP. A watermark embedding system has previously embedded

watermarks carrying watermark identifiers into stickers. The stickers (or packages of them) also include a registration identifier used to activate the behaviors associated with them.

The registration system maintains a registration database including records of the registration identifiers and corresponding watermark identifiers. The registration identifiers are serialized numbers corresponding to the watermarked stickers or packages of them. The watermark identifiers are a form of object identifiers that are encoded into the watermarks on the corresponding stickers. The registration system maintains a registration database 110 of data records indicating the watermark identifiers associated with each registration identifier. When a user selects a behavior to be associated with a watermarked object via the registration system, the registration system sends an update 112 to a behavior database 114 specifying the behavior to be associated with a corresponding watermark identifier. In response, the database management system 108 updates its database to include a record that indicates the behavior associated with a particular watermark identifier.

The database management system 108 is also responsible for supporting machine behavior associated with a watermarked sticker in response to detection of the watermark on the sticker. It has a network interface for communicating with other computers over the Internet. In particular, it receives requests in the form of an XML packet from a watermark decoding computer, extracts a watermark identifier from the packet and looks up the associated behavior or behaviors in the behavior database. It then initiates the associated behavior. The details of how this behavior is carried out depend on the application and type of behavior.

In a typical registration process, the user accesses the registration system via a registration web site, which presents an HTML interface to the users' computers. The user may fetch the HTML pages of this interface using an Internet browser or application program, like the watermark decoder application executing on the computer 100. This interface enables the user to enter a registration identifier to start a process of associating behaviors with watermark identifiers embedded in watermarked stickers. In response to a registration identifier, the registration system returns a page that enables the user to

specify the behavior. In the case where the behavior is linking a watermarked sticker to a web site, the user specifies the network address of the web site, such as a URL or IP address. In the case where the behavior is linking a watermarked sticker to an email message, the user specifies the email address of the email recipient.

As noted above, there are many other types of watermark enabled behaviors. They can be classified as providing information to the watermark decoding computer, launching some software program or machine action, or a combination of both. Table 1 below gives some examples of behaviors, and the related information and actions.

Table 1

10

Behavior Type	Information Returned to Decoding Computer	Associated Machine or Software Actions
linking to web site	URL, web page	launching browser on client to fetch/render web page at URL
opening an email client	email address of target recipient	launching email client and populating address field with target recipient
starting a chat session	address of chat session	launching chat application (watermarks on the stickers can be designed such that only those holding the stickers can gain access to the chat session, each by showing the sticker to his or her watermark decoder enabled camera)

Parameter	Value	Unit
Temperature	25.0	°C
Pressure	1.0	atm
Concentration	0.1	M
Time	10.0	min
Wavelength	254	nm
Path length	1.0	cm
Sample	Water	
Blank	Water	
Reference	Water	
Method	UV-Vis	
Instrument	UV-160U	
Software	UV-PRO	
Operator	J. Doe	
Date	2023-10-27	
Time	14:30	
Location	Lab 101	
Project	Water Quality	
Sample ID	WQ-001	
Blank ID	WQ-002	
Reference ID	WQ-003	
Method	UV-Vis	
Instrument	UV-160U	
Software	UV-PRO	
Operator	J. Doe	
Date	2023-10-27	
Time	14:30	
Location	Lab 101	
Project	Water Quality	
Sample ID	WQ-001	
Blank ID	WQ-002	
Reference ID	WQ-003	

accessing account information or other network resources	address of account information	launching of browser application to access account information through a web interface; supplying user authentication information from watermarked object and/or from user (user password, user name, log on, etc.)
sending an electronic card	card template	launching client application to enable the user to design the card and add personal message, launching email application to send electronic card (or link to electronic card)
placing a phone or video conference call	phone number or IP address of destination	launching application to initiate phone call over the internet or telephone network
props in an interactive computer game	identifier of prop, and possibly other context information, such as game player holding the prop, etc.	game application receives prop and context information and responds accordingly

visual aid for disabled users	returns information in the form of graphics, audio, or video (may provide address of audio or video content at an audio or video server on the Internet)	browser, or other media player applications render the information (such as the streaming media) on the decoding computer
machine control	machine instruction	machine or software executes instruction

For a given application, the registration system provides information to the user to enable the user to select the behavior and provide pertinent information, such as URL, IP address, phone number, email address, content file (e.g., audio, image or video file), etc.

5 The registration system formulates a description of the behavior, associates it with the watermark identifier specified by the user, and creates an update 112 to the behavior database.

The user then uses the stickers or shares them with friends. To trigger the behavior of a sticker, a user captures an image of the sticker with an image capture device 102 using a watermark decoder application 104 executing on the computer 100. The watermark decoder extracts the watermark identifier from a watermark embedded in the image on the sticker. It then sends the watermark identifier to the database management system 108 via the Internet, which in turn, looks up the associated behavior. The database management system then triggers the associated behavior by sending 15 information, or instructions back to the decoding computer. The decoding computer renders the information, and launches a software or other machine action associated with the instructions returned from the database. The database need not be implemented in a remote computer. For example, the database may be implemented in the watermark decoding computer or device.

20 As an enhancement to the registration process, objects may carry watermarks that automatically link the user to the registration web site. For example, one side of the sticker 116 or its packaging 118 may contain a watermark with the network address or an

index to a network address of the registration web site. The user shows this part of the sticker or packaging to the image capture device. The watermark decoder extracts the watermark and looks up the network address in the behavior database, and launches a browser to fetch the registration web site. The watermark may also carry the registration identifier. In this case, the registration web site can tailor the web page returned to the user to be specific to the watermarked object. If the user or someone else previously associated a behavior with the sticker, the registration web site returns the current status associated with the registration identifier and the behaviors associated with the watermarked objects linked to that registration identifier. To get detailed information about particular watermarked objects during the registration process, the user can show the watermarked object to a camera, and use a watermark decoder to extract the watermark identifier and supply it to the registration system. In response, the registration system takes the watermark identifier, queries the behavior database via the database management system, and returns a description of the associated behaviors. This approach provides a simple and automated process of activating watermark enabled objects.

For more information about an object identifier registration system and system for linking objects with machine behaviors, see US Patent No. 09/571,422, which is hereby incorporated by reference.

In some applications, the user may wish to create his or her own watermarked objects. Fig. 2 illustrates a system that enables users to assign watermark identifiers to corresponding behaviors and objects and update the behavior database. In this particular system, the user's computer includes a watermark embedder application (120). However, the embedder application may be implemented on a separate computer, such as a server on the Internet accessible via a client application on the user's computer 100. In the former case, the user embeds the watermark into the desired image content on his computer. In the latter case, the client supplies the image content to the server, which performs watermark embedding and returns watermarked images to the client. In both cases, the watermarked objects are created by printing the watermarked images on objects.

The process begins when an embedder 120 creates a registration request. In the system shown in Fig. 2, the embedder 120 is a software application running on the computer 100. The embedder formulates the request in a request file. The system provides a template for the request file. The request file specifies the number of watermark identifiers requested and the names of the media files to be embedded. The file may also specify the behaviors to be associated with each watermark identifier. Alternatively, the user can specify the behaviors to be associated with the watermark identifier at a later time using the methods described in this document. In the case where embedding is performed on a server as opposed to the user's computer, the request file may also include the media file (e.g., an image file) carrying the content to be embedded with the watermark identifier.

Next, the embedder connects, via a network connection, to the registration system 106. In particular, it connects to a registration web site via an Internet connection. This web site requests the embedder's username and password to authenticate it.

The user enters his username and password via a user interface displayed on the PC 100 and submits them to the web site for authentication.

Upon authentication, the registration website 106 returns an HTML page presenting the embedder with a user interface screen that allows the user to locate the embedder's registration request file for uploading to the web site. The user then enters a command to instruct the embedder to upload the selected request file.

The embedder provides the information required to locate the file on the embedder's computer and submits it for upload.

The registration request file is uploaded into a registration loader program 122.

The registration loader 122 performs a quick scan of the uploaded registration request file and reports back to the embedder any errors in format that it detects. If there are errors, the file is not processed.

If the registration request file is properly formatted, the embedder receives a confirmation from the registration website 106 that the request file has been successfully uploaded and will be submitted for processing by the registration loader 122.

The embedder may now either submit a new registration request file or logoff of the registration web site 106.

The registration loader 122 uses the information contained in the embedder's uploaded registration request file to automatically allocate (register) watermark
5 identifiers in a registration database 110. The identifiers are in the form of serial numbers. Once this process is completed, the registration loader 122 initiates a request to a registration extractor 124 for these new registration entries.

Upon receipt of a request, the registration extractor 124 accesses the registration database 110 and creates embedder control files for each of these new registered
10 watermark identifiers (e.g., serial numbers).

Upon completion of this process, the registration extractor 124 process sends the embedder control file(s) back to the embedder via Internet e-mail. In the event that the embedder is server based, the extractor sends the control file(s) (or a pointer to them) to the embedder server 126, which may be integrated with the registration system or
15 implemented at a different Internet site. The extractor 124 also sends an update 128 to the behavior database 114 to create database records associating each of the watermark identifier with a behavior.

Once the embedder 120 has received the embedder control file(s), it uses these file(s), along with the media file(s) (in this case, image files) and a set of embedding
20 instructions to the embedder 120 to instruct the embedder to automatically embed the list of watermark serial numbers included in the embedder control file(s) into the listed media files, producing a set of watermark-embedded media files. In the case where the embedder is server based, the client executing on the PC 100 uploads the media files to be embedded to the embedder server, either directly or as part of the registration process
25 (e.g., as part of the request file). The embedder server then returns the watermarked files to the computer 100 via e-mail or other network file transfer protocol.

For detailed disclosure describing how to embed watermarks in media signals, including images, audio, and video, see US Patent 5,862,260, and co-pending application 09/503,881, filed February 14, 2000, incorporated above.

The embedder may create watermarked objects by printing watermarked images on objects, such as stickers, documents, etc. The embedder sends the watermarked image to a printer 128, which in turn, prints the image on an object.

The above system provides a mechanism for linking objects to machine behaviors. As noted previously, this mechanism applies to both physical objects, like stickers and packaging, and electronic objects, like image, audio and video signals. It also applies to other forms of machine readable signal carriers that can be applied to such objects, including bar codes, magnetic stripes, Radio Frequency tags, integrated circuit chips, organic transistors, etc. These machine readable carriers can be used in the same way that watermarks are used in the example of watermarked enabled stickers above.

While these technologies provide a mechanism for linking objects to machine behaviors, there is a need for a tool that explicitly facilitates the creative coordination between the object and the behavior linked to it. The linking process results in a potentially complex database structure which not only embodies the fundamental object to behavior link, but also might include a hierarchy of delivered responses as a function of user implicit or explicit requests. Or, said in a quite different way, the creative process of linking an object to complex data-driven responses is itself a creative endeavor all to itself, involving thinking through the various different reactions that users will want and expect when using an object as a portal. The artist who is tasked with creating the choreography between an object and a simple or complex machine behavior will need explicit assistance from well designed tools, resulting in a database record which memorializes that creativity as an active element within a connectivity system described in this document and US Patent Application 09/571,422. The immediate creative output is a database structure. The long term creative output is the active use of that structure as a stimulus-response hub.

Whether a link design tool be web-server based, or whether it be a stand-alone application similar in kind to an Adobe Photoshop or a Quark Express, it is possible to offer visual metaphors to a creative designer which literally presents that designer with an image of the to-be-linked object along with explicit visual links to one or more data responses.

One embodiment of this tool for linking printed objects to web pages is a local computer application which presents an image of a printed object on the left side of an application's window pane and the image of a web page on the right side of the application pane. The images of the printed objects may be stored locally or fetched from a remote device (e.g., a content database) and rendered to the left side of the screen. Similarly, the web pages may be stored locally or downloaded from web sites on the Internet or some other network. The user interface of the application displays a control such as a button, labeled, "Connect", "Link" or some other active word representing the process of associating an object with a corresponding machine behavior. The user, having browsed through a series of objects to be linked, and browsed through a series of potential web site destinations, finding the best "matched-pair", pushes the button and off this relational link goes into a queue waiting to "go live", or, in other words, a temporary record is stored for a candidate link to be sent to the behavior database of the linking system described previously. A user can perform multiple links per session, queueing them up as they go, reviewing the queue at some point in time, then directing the links to become active at the behavioral database, as described previously and in the referenced documents.

An extension begins by generalizing the single printed item to be an icon or visual analogy to a related set of printed material. Graphical user interface methods can be employed to move, manipulate, view and otherwise process this icon in a fashion familiar to creative professionals. Likewise, surrounding this generalized icon representing the object(s) to be printed can be a whole series of icons representing a variety of potential data-delivered responses that are possible links. Existing web pages, placeholders for web pages to be designed, streaming media icons, Java application icons, "links to links" icons wherein a given response may explicitly point to a menu of actions presented to the end user. (end user = consumer doing the linking). This list of possible responses is incomplete but nevertheless representative of graphically displaying the possible relationships between printed material and data responses.

As in the baseline case, various relationships can be created between objects and responses, ultimately stored into a queue. The actual functionality and quality assurance

of the links could be tested in the process. Once the creative artist is satisfied with their link or set of links, the queue can be sent to go live at the behavior database and further double checks on quality performed.

Concluding Remarks

5 Having described and illustrated the principles of the technology with reference to specific implementations, it will be recognized that the technology can be implemented in many other, different, forms. To provide a comprehensive disclosure without unduly lengthening the specification, applicants incorporate by reference the patents and patent applications referenced above.

10 While the invention is illustrated with reference to watermarked stickers, aspects of the invention apply to other object types including media signals like audio and video. There are number of different watermark embedding and decoding methods that may be used. The watermark embedding process may modulate features of a signal in the time, frequency, spatial or some other transform domain of the signal to be watermarked.

15 In addition to an object identifier, the watermark may be used to convey other information, such as an index to related metadata, rendering control instructions, etc. For example, the watermark can carry a network address or index to a network address to link the watermarked signal to a network resource such as a related web site.

20 Other machine readable codes may be embedded in an object and used to link the object to a machine behavior. Some examples include bar codes, magnetic stripes, RF tags, etc. The devices and methods used to extract an identifier from the machine readable code differ, yet the process for registering identifiers and associating behavior with objects may be similar.

25 The methods, processes, and systems described above may be implemented in hardware, software or a combination of hardware and software. For example, the auxiliary data encoding processes may be implemented in a programmable computer or a special purpose digital circuit. Similarly, auxiliary data decoding may be implemented in software, firmware, hardware, or combinations of software, firmware and hardware. The methods and processes described above may be implemented in programs executed from

a system's memory (a computer readable medium, such as an electronic, optical or magnetic storage device).

The particular combinations of elements and features in the above-detailed embodiments are exemplary only; the interchanging and substitution of these teachings with other teachings in this and the incorporated-by-reference patents/applications are also contemplated.

Parameter	Value	Unit
1. α_{11}	0.0000	
2. α_{12}	0.0000	
3. α_{13}	0.0000	
4. α_{14}	0.0000	
5. α_{15}	0.0000	
6. α_{16}	0.0000	
7. α_{17}	0.0000	
8. α_{18}	0.0000	
9. α_{19}	0.0000	
10. α_{10}	0.0000	
11. α_{11}	0.0000	
12. α_{12}	0.0000	
13. α_{13}	0.0000	
14. α_{14}	0.0000	
15. α_{15}	0.0000	
16. α_{16}	0.0000	
17. α_{17}	0.0000	
18. α_{18}	0.0000	
19. α_{19}	0.0000	
20. α_{10}	0.0000	
21. α_{11}	0.0000	
22. α_{12}	0.0000	
23. α_{13}	0.0000	
24. α_{14}	0.0000	
25. α_{15}	0.0000	
26. α_{16}	0.0000	
27. α_{17}	0.0000	
28. α_{18}	0.0000	
29. α_{19}	0.0000	
30. α_{10}	0.0000	
31. α_{11}	0.0000	
32. α_{12}	0.0000	
33. α_{13}	0.0000	
34. α_{14}	0.0000	
35. α_{15}	0.0000	
36. α_{16}	0.0000	
37. α_{17}	0.0000	
38. α_{18}	0.0000	
39. α_{19}	0.0000	
40. α_{10}	0.0000	
41. α_{11}	0.0000	
42. α_{12}	0.0000	
43. α_{13}	0.0000	
44. α_{14}	0.0000	
45. α_{15}	0.0000	
46. α_{16}	0.0000	
47. α_{17}	0.0000	
48. α_{18}	0.0000	
49. α_{19}	0.0000	
50. α_{10}	0.0000	
51. α_{11}	0.0000	
52. α_{12}	0.0000	
53. α_{13}	0.0000	
54. α_{14}	0.0000	
55. α_{15}	0.0000	
56. α_{16}	0.0000	
57. α_{17}	0.0000	
58. α_{18}	0.0000	
59. α_{19}	0.0000	
60. α_{10}	0.0000	
61. α_{11}	0.0000	
62. α_{12}	0.0000	
63. α_{13}	0.0000	
64. α_{14}	0.0000	
65. α_{15}	0.0000	
66. α_{16}	0.0000	
67. α_{17}	0.0000	
68. α_{18}	0.0000	
69. α_{19}	0.0000	
70. α_{10}	0.0000	
71. α_{11}	0.0000	
72. α_{12}	0.0000	
73. α_{13}	0.0000	
74. α_{14}	0.0000	
75. α_{15}	0.0000	
76. α_{16}	0.0000	
77. α_{17}	0.0000	
78. α_{18}	0.0000	
79. α_{19}	0.0000	
80. α_{10}	0.0000	
81. α_{11}	0.0000	
82. α_{12}	0.0000	
83. α_{13}	0.0000	
84. α_{14}	0.0000	
85. α_{15}	0.0000	
86. α_{16}	0.0000	
87. α_{17}	0.0000	
88. α_{18}	0.0000	
89. α_{19}	0.0000	
90. α_{10}	0.0000	
91. α_{11}	0.0000	
92. α_{12}	0.0000	
93. α_{13}	0.0000	
94. α_{14}	0.0000	
95. α_{15}	0.0000	
96. α_{16}	0.0000	
97. α_{17}	0.0000	

We claim:

1. A system for enabling a user to associate a machine behavior with an object comprising:

a registration system enabling a user to specify a machine behavior to be associated with an object via an object identifier;

a database management system in communication with the registration system for receiving and maintaining records associating object identifiers with machine behaviors, wherein the database management system is operable to receive object identifiers and in response, to initiate the machine behavior or behaviors associated with the object identifiers.

2. The system of claim 1 wherein the registration system includes a network interface that enables users to associate behaviors with object identifiers from remote client computers.

3. The system of claim 1 wherein the object identifiers comprise watermark identifiers which are embedded in watermarks on corresponding objects.

4. The system of claim 3 wherein the objects are watermarked stickers.

5. The system of claim 3 wherein the machine behavior includes fetching a web site relating to an object carrying the object identifier.

6. The system of claim 1 including a user interface that enables a user to view an image of an object along with an image of a behavior to be associated with the object, the user interface including a control that enables the user to associate the object with the behavior, and the user interface being operable to communicate a database structure to the database management system specifying an object identifier for the object and a description of the behavior.

7. The system of claim 6 wherein the object identifier is embedded into the object using a watermark.

8. The system of claim 6 wherein the behavior is fetching a web page.

9. The system of claim 8 wherein the database management is responsive to a watermark identifier extracted from a watermarked object by a watermark decoding computer to initiate a process of directing a web page to the watermark decoding computer.

10. A method for enabling a user to associate a machine behavior with an object comprising:

presenting a user interface enabling a user to specify an object and a machine behavior to be associated with the object;

receiving a specification of an object and a behavior to be associated with that object; and

updating a database with an entry specifying an object identifier of the object and the behavior, wherein the database is operable to initiate the behavior in response to receiving an object identifier decoded from machine readable code on the object.

11. The method of claim 10 wherein the specification of the object includes a registration identifier provided on the object or packaging of the object.

12. The method of claim 11 wherein the registration identifier is embedded in a watermark on the object.

13. The method of claim 12 wherein the user interface is launched in response to decoding the watermark on the object.

14. The method of claim 13 wherein the user interface is a web based interface, and the user establishes a connection with the web based interface automatically in response to decoding the watermark on the object.

5 15. A computer readable medium having software for performing the method of claim 10.

10 16. A watermark enabled object associated with a machine behavior via a watermark embedded in the object, wherein the machine behavior is triggered in response to decoding the watermark in the object.

17. The object of claim 16 wherein the object is a sticker.

15 18. The object of claim 16 wherein the object is a prop in a computer game, and the prop supplies information to the computer game by conveying the information in a message embedded in a watermark on the prop.

20 19. The object of claim 16 wherein the object has two or more facets, each facet being embedded with a different watermark message used to control the game.

20 20. The object of claim 18 wherein the message includes an index to a database entry where information for controlling the game is stored.

25 21. The object of claim 16 wherein the machine behavior includes launching an email program and an email directed to a destination associated with the object via the watermark.

30 22. The object of claim 16 wherein the machine behavior includes launching an Internet chat session.

5

[illegible]


User Control and Activation of Watermark Enabled Objects

Abstract of the Disclosure

Methods and systems for associating watermark enabled objects with machine behaviors. Machine behaviors refer to actions by devices or systems in response to a triggering event. Examples of these behaviors include fetching a web page, opening an email client to send an email to a specific person, initiating a phone or video conference call, etc. A registration system enables users to associate machine behaviors with objects through a watermark embedded in the objects. The decoding of the watermark initiates a process for triggering the machine behaviors associated with the watermarked object.

While the disclosure describes an implementation for stickers as a class of watermark enabled objects, the system and related methods apply to other forms of watermark enabled objects, including both electronic and physical objects.

Fig. 1

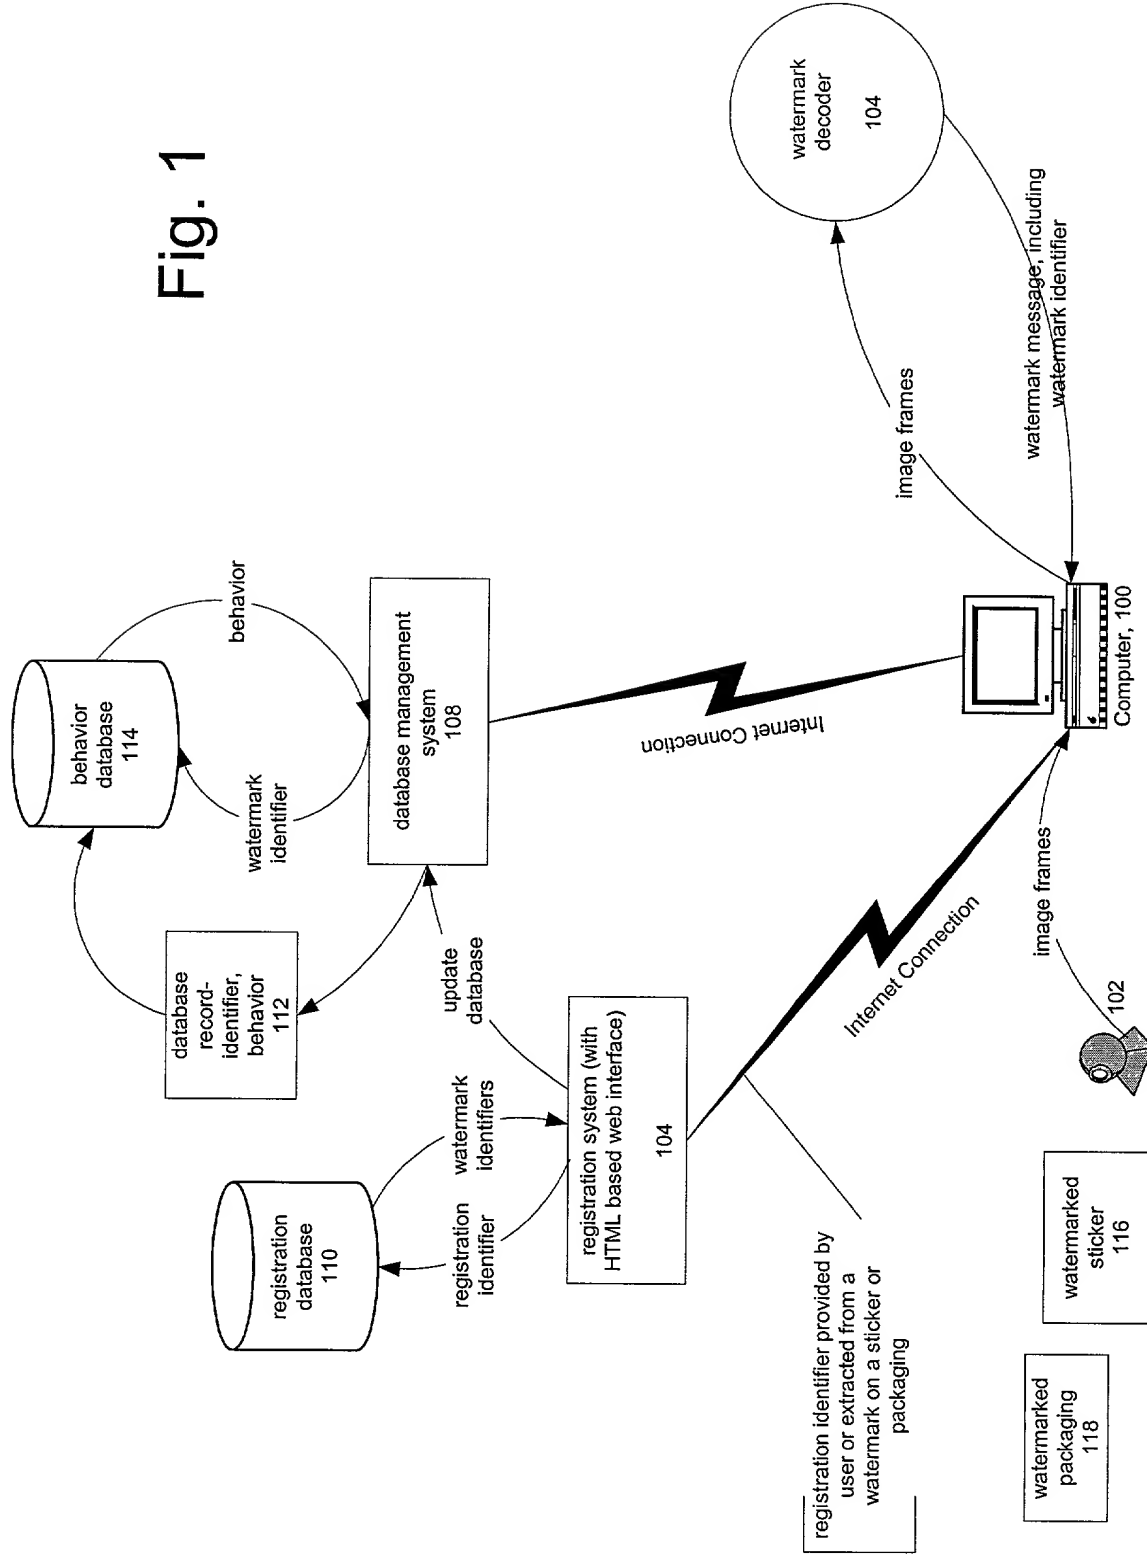

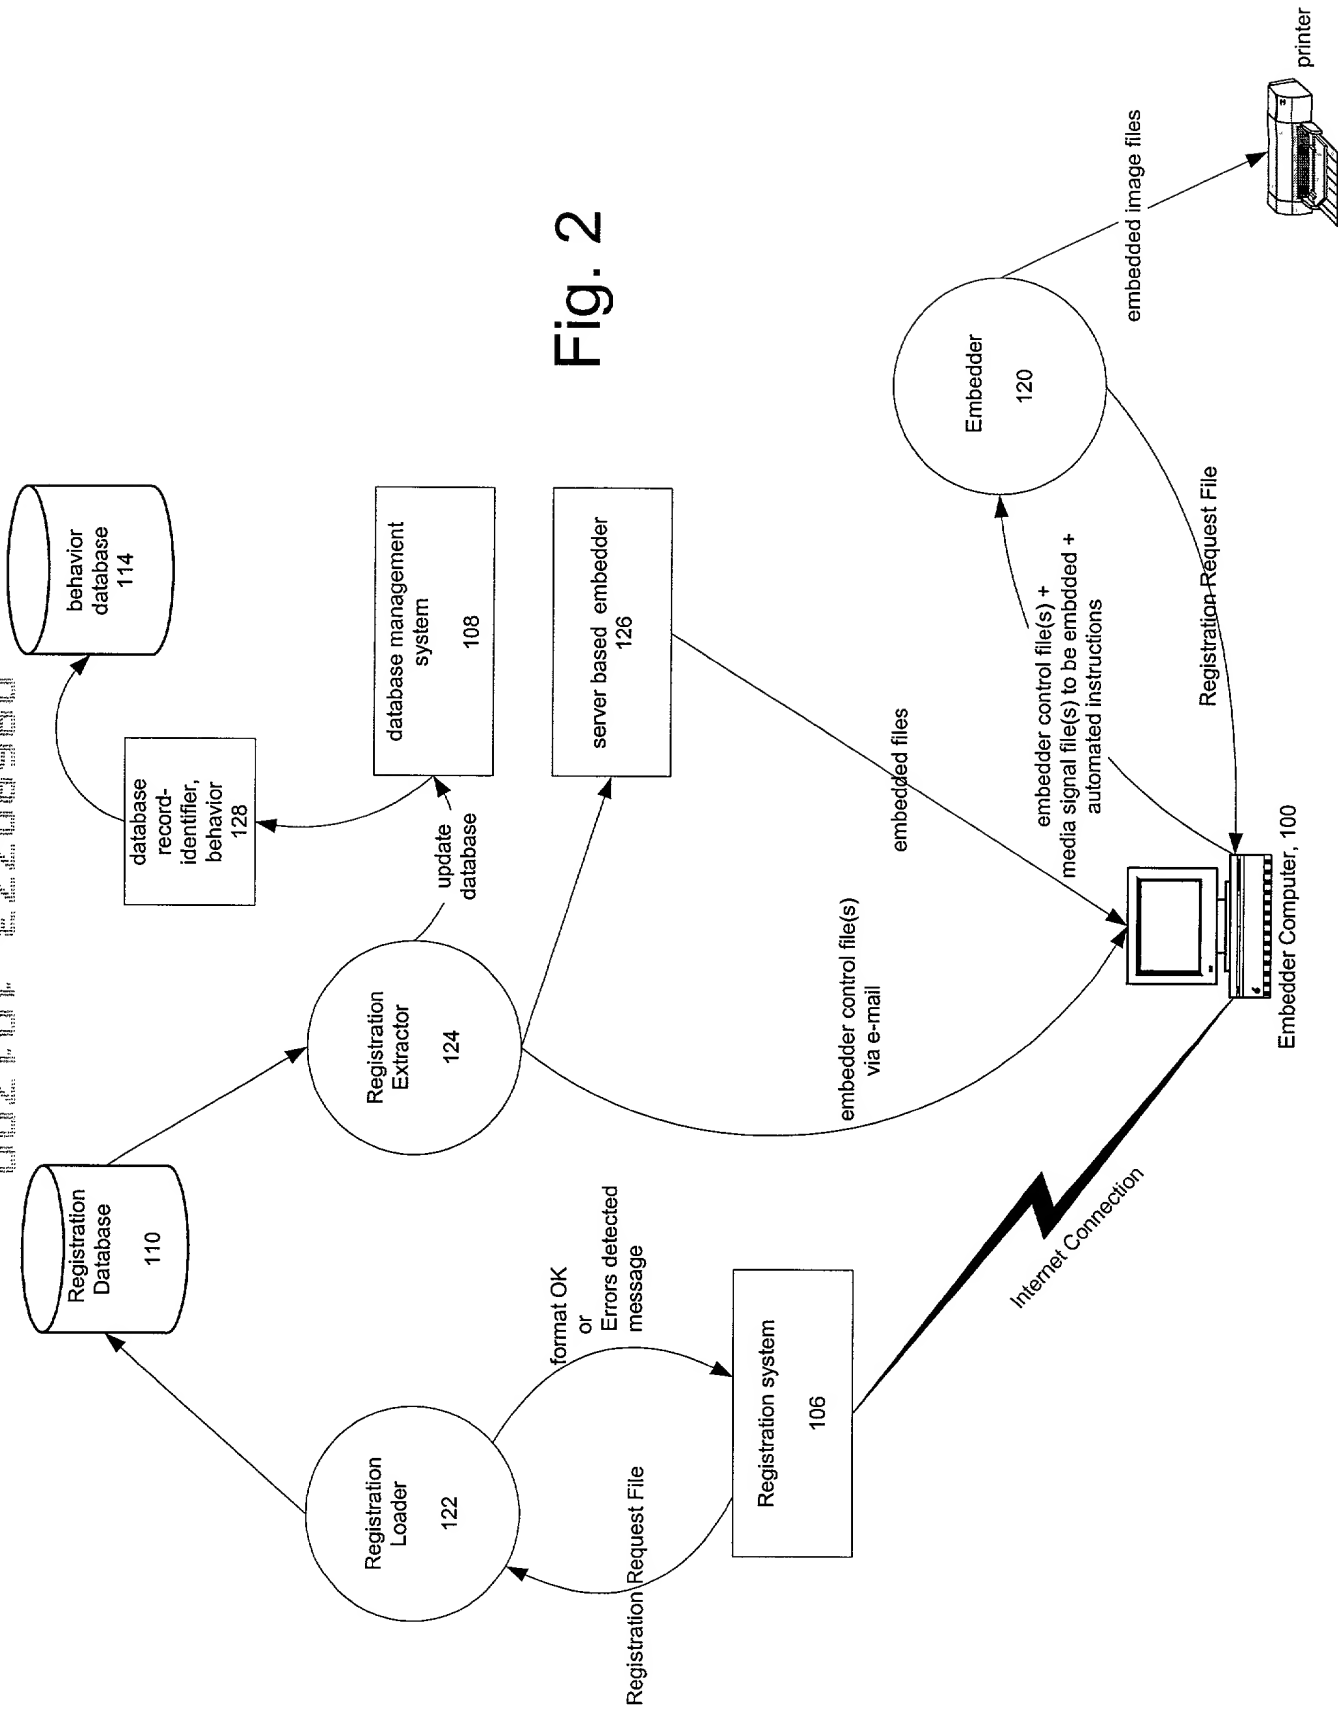


Fig. 2

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **USER CONTROL AND ACTIVATION OF WATERMARK ENABLED OBJECTS**, the specification of which

- ☒ is attached hereto.
- ☐ was filed on _____ as Application No. _____.
- ☐ was described and claimed in PCT International Application No. _____, filed on _____, and as amended under PCT Article 19 on _____ (if applicable).
- ☐ and was amended on _____ (if applicable).
- ☐ with amendments through _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56. If this is a continuation-in-part application filed under the conditions specified in 35 U.S.C. § 120 which discloses and claims subject matter in addition to that disclosed in the prior copending application, I further acknowledge the duty to disclose material information as defined in 37 CFR § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

60/134,782	May 19, 1999
_____ Application Number	_____ Filing Date

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or § 365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

09/633,587	8/7/00	Pending
09/343,104	6/29/99	Pending
09/571,422	5/15/00	Pending
60/134,782	5/19/99	Abandoned
(Application No.)	(Filing Date)	(Status: patented, Pending, abandoned)

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from _____ as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application, to file a corresponding international application, and to transact all business in the Patent and Trademark Office connected therewith:

William Y. Conwell	Reg. No. 31,943
Joel R. Meyer	Reg. No. 37,677
Thomas M. Horgan	Reg. No. 33,183
Elmer Galbi	Reg. No. 19,761

Address all telephone calls to Joel R. Meyer at telephone number (503) 885-9699.
Address all correspondence to:

Joel R. Meyer
DIGIMARC Corporation
Digimarc Corporation
19801 SW 72nd Avenue, Suite 250
Tualatin, OR 97062

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Joint Inventor: Geoffrey B. Rhoads

Inventor's Signature _____

_____ Date

Residence: West Linn, Oregon

Citizenship: USA

Post Office Address: 2961 SW Turner Road, West Linn, Oregon 97068

